

Features


- 20A- 50A Contact Change-over Capacity
- With installation base panel



JQX-20A/30A/40A




JQX-20A/30A/40A



JQX-40A/50A/60A

Power Relay

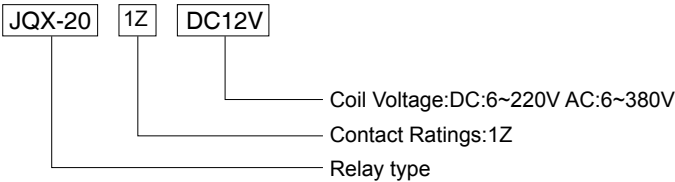

Contact Ratings

Contact Ratings	1Z
Contact Resistance	100MΩ (1A 6VDC)
Contact Material	AgCdO
Contact Capacity	20A,30A,40A,50A,60A 250VAC/28VDC

Specification

Insulation Resistance	500MΩ .500VDC
Dielectric Strength	BCC 2000VAC 1min
	BOC 1200VAC 1min
Operate Time	20ms/20ms
Terminal Type	Screw


Coil Ratings

Nominal Coil Power	DC2.0W AC2.5VA
--------------------	----------------

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω: ± 10%	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω: ± 10%
6	4.20	0.60	18	12	9.60	3.60	5.5
12	8.40	0.20	72	24	19.20	7.20	100
24	16.8	2.40	288	48	38.40	14.40	410
48	33.6	4.80	1150	110	88.00	36.00	2100
60	42.0	6.00	1800	220	176.00	72.00	8640
110	88.0	11.0	6050	240	176.00	72.00	10280

Dimension.Bottom View

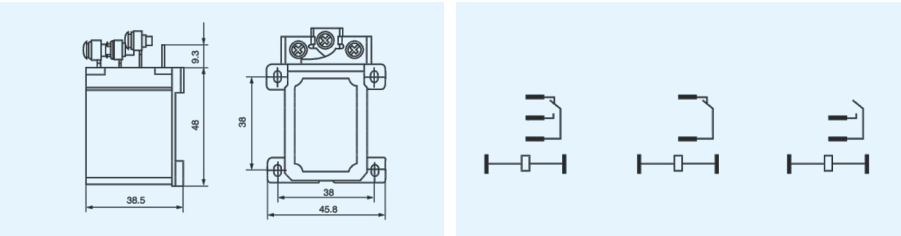

Reference Data

