


Features

- With open type, dust-proof cover type
- With matched socket

Power Relay

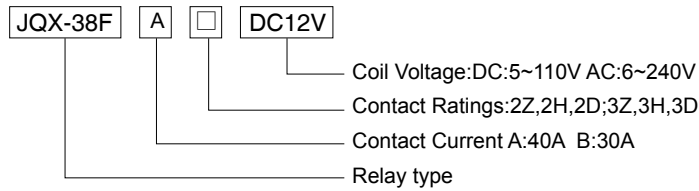

JQX-38F(平)

Contact Ratings

Contact Ratings	2Z,2H,2D	3Z,3H,3D
Contact Resistance	100M Ω (1A 6VDC)	
Contact Material	AgCdO	
Contact Capacity	30A/40A 250VAC/30VDC	30A/40A 250VAC/30VDC

Specification

Insulation Resistance	1000M Ω .500VDC		
Dielectric Strength	BCC	2000V	1min
	BOC	1200V	1min
Operate Time	25ms/20ms		
Terminal Type	PCB		

Coil Ratings

Nominal Coil Power	DC2W~2.5W AC4.5VA
--------------------	-------------------



Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : $\pm 10\%$	Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω : $\pm 10\%$
12	8.40	1.20	57	12	9.60	3.60	10
24	16.8	2.40	230	24	19.20	7.20	50
48	33.6	4.80	1050	110	88.00	36.00	970
60	42.0	6.00	1800	220/240	176.0	72.00	2500



JQX-38F

Dimension.Bottom View

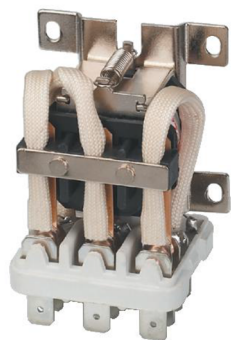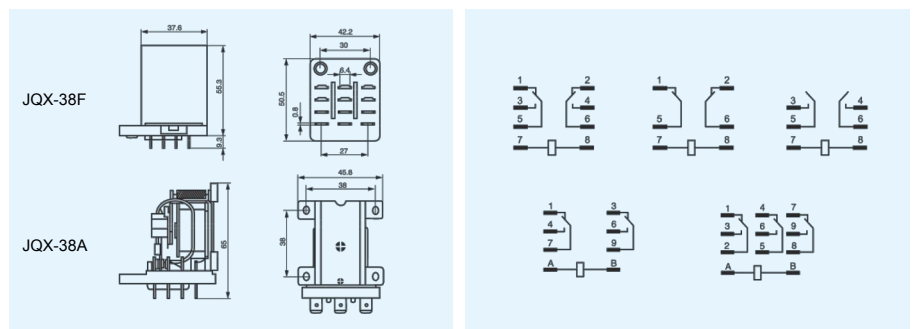

JQX-38F S

Reference Data

