


Features

- 10A high power relay
- 1A,1B,1C、 2A,2B,2C configurations
- Sealed version available

PCB Relay

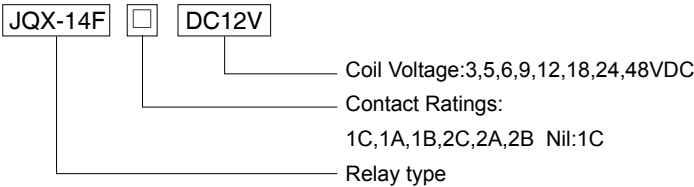

Contact Ratings

Contact Ratings	1A,1B,1C	2A,2B,2C
Contact Resistance	100M Ω (1A 6VDC)	
Contact Material	Silver Alloy	
Contact Capacity	10A,16A 250VAC/28VDC	5A-7A 250VAC/28VDC
	TV-5	

Specification

Insulation Resistance	100M Ω .500VDC		
Dielectric Strength	BCC	5000VAC	1min
	BOC	1000VAC	1min
Operate Time	15ms/5ms		
Terminal Type	PCB		

Coil Ratings

Nominal Coil Power	0.56W,0.72W
--------------------	-------------

Coil Versions

Nominal Voltage VDC	Coil Resistance at 20° C $\pm$ 10% (Ω)		Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.53W	0.72W			
3	17	12.5	2.25	0.3	4.2
5	47	36	3.75	0.5	7.0
6	68	50	4.50	0.6	8.4
9	160	115	6.75	0.9	12.6
12	275	200	9.00	1.2	16.8
24	1100	800	18.00	2.4	33.6
48	4170	3200	36.00	4.8	67.2




JQX-14F 1Z



JQX-14F 2Z

Dimension.Bottom View

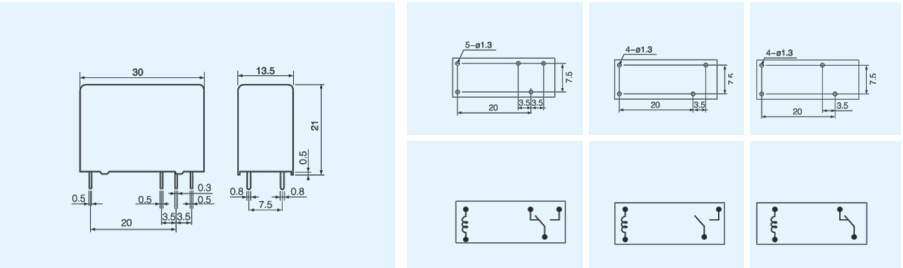

Reference Data

